

# ARC 200

## Fixed

# ORLUNA®


### Luminaire Details

|                       |                            |
|-----------------------|----------------------------|
| Cut-out               | Ø40mm                      |
| Recess Depth          | 55mm                       |
| Clearance             | Ø250mm                     |
| Fixing Method         | Retention Spring           |
| Min Ceiling Thickness | 5mm                        |
| Max Ceiling Thickness | 28mm                       |
| Max Driver Distance   | 20m                        |
| Class                 | III                        |
| IP Rating             | IP54                       |
| IP Zone               | Zone 1                     |
| Material              | Aluminium ADC12            |
| Cable type            | 2 Core 0.75mm <sup>2</sup> |
| Cable Length          | 300mm                      |
| Bezel Temp            | F Rated                    |



### How to Install

- Cut hole in ceiling as per above cut-out;
- Wire luminaire cable to OrLuna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
- With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
- Feed luminaire into cut-out, ensuring Ø250mm around luminaire and driver is left clear of insulation.

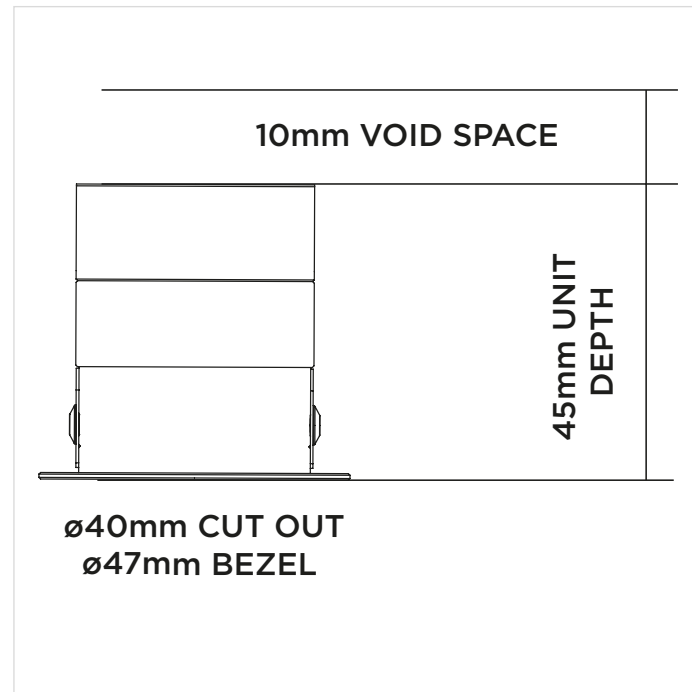

06/11/17

**ORLUNA<sup>®</sup>**

Installation Instructions