

# AIR TRACK ORIGIN HIGH OUTPUT

# ORLUNA®


## Adjustable

Project Reference: \_\_\_\_\_

Product Reference: \_\_\_\_\_

### Luminaire Details

|              |                            |
|--------------|----------------------------|
| Fitting Type | Adjustable Spotlight       |
| IP Rating    | IP54                       |
| Warranty     | 5 Years                    |
| Class        | III                        |
| IP Zone      | Zone 1                     |
| Standards    | CE, BS EN 60598            |
| Material     | Aluminium ADC12            |
| Cable type   | 2 Core 0.75mm <sup>2</sup> |
| Cable Length | 300mm                      |
| Bezel Temp   | F Rated                    |

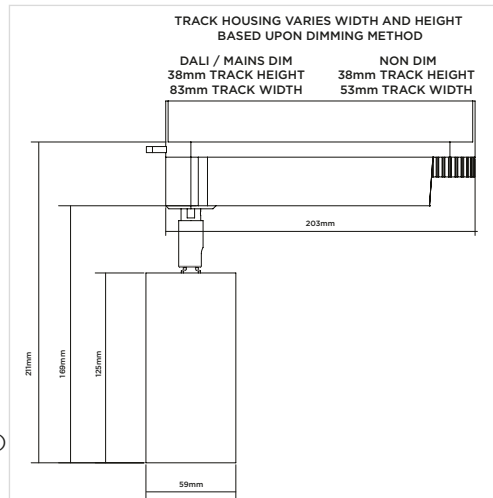

### Features & Benefits

- TRUE BEAM
- Full beam options
- EUTRAC track adaptor (2- & 3-channel)
- Change accessories from the front

### 2700K ORIGIN HIGH OUTPUT 85CRI

### 3000K ORIGIN HIGH OUTPUT 85CRI

| LIGHT VALUES       | MEDIUM           | WIDE       | * All values are per light engine | MEDIUM           | WIDE           |            |
|--------------------|------------------|------------|-----------------------------------|------------------|----------------|------------|
| Beam Width FWHM    | <b>35°</b>       | <b>46°</b> |                                   |                  | <b>35°</b>     | <b>46°</b> |
| Initial Lumens*    | 1533             | 1533       |                                   |                  | 1658           | 1658       |
| Engine Lumens*     | 1290             | 1278       |                                   |                  | 1403           | 1403       |
| *(Tc 85°C, +/-7%)  |                  |            |                                   |                  |                |            |
| Engine Lm/W        | 111              | 110        |                                   |                  | 121            | 121        |
| Luminaire Cd       | 1902             | 1288       |                                   |                  | 2050           | 1389       |
| Binning SDCM (Hot) | 2                |            |                                   |                  | 2              |            |
| DUV                | 0.001            |            |                                   |                  | 0.001          |            |
| CRI (typ)(R9)      | <b>85 (15)</b>   |            |                                   |                  | <b>85 (10)</b> |            |
| TM30 Rf Rg         | Rf 85 Rg 95      |            |                                   | Rf 83 Rg 95      |                |            |
| Lifetime (ambient) | L90 B5 50,000hrs |            |                                   | L90 B5 50,000hrs |                |            |

For full test data, see Luminaire Photometric Reports at [orluna.com/downloads](http://orluna.com/downloads)

### LUMINAIRE POWER

|                     |       |       |
|---------------------|-------|-------|
| Voltage             | 34v   | 34v   |
| Drive Current       | 300mA | 300mA |
| Circuit Power (typ) | 11.6W | 11.6W |

### DRIVER

|                       |                                    |
|-----------------------|------------------------------------|
| Protocols             | Mains Dim / DALI / 0-10V / Non-dim |
| Dim to Dark           | 0.1% Lux                           |
| Distance from product | 20m (series wiring)                |
| Emergency             | Emergency packs available          |

### Specification Code

|             |           |  |  |                        |  |  |   |
|-------------|-----------|--|--|------------------------|--|--|---|
| Engine type | Bezel     | Colour Temp                            | Driver   | Beam Width             | Bezel Colour   | Baffle Colour  | Options   |
| <b>HO</b>   | <b>AT</b> | <b>27</b>                              | <b>M</b>   | <b>M</b>               | <b>W</b>   | <b>BB</b>  | <b>54 H</b>   |
|             |           | 27 / 2700K<br>30 / 3000K<br>40 / 4000K | M / Mains Dim<br>D / DALI<br>O / 0-10v<br>N / Non Dim<br>X / No Driver | M / Medium<br>W / Wide | W / White 9010<br>D / White 9003<br>E / White 9016<br>B / Black 9005<br>F / Antique Brass<br>G / Polished Brass<br>J / Antique Bronze<br>K / Brushed Chrome<br>L / Polished Chrome<br>H / Antique Copper<br>I / Polished Copper<br>C / Other RAL | BB / Black 9005<br>WB / White 9010<br>DB / White 9003<br>EB / White 9016<br>FB / Antique Brass<br>GB / Gold Anodised<br>JB / Antique Bronze<br>KB / Brushed Chrome<br>LB / Polished Chrome<br>HB / Antique Copper<br>IB / Polished Copper<br>MB / Polished Brass<br>CB / Other RAL | 54 / IP54<br>H / Honeycomb<br>S / Spreader Lens<br>N / Frosted Lens<br>Z / LSZH Cable |

ORLUNA LED Technologies  
Unit C, Holly Industrial Park,  
Ryan Way, Watford  
Herts WD24 4YP

info@orluna.com

+44 (0) 1923 889 712

04/24/18