

# CURVE ORIGIN

Fixed


# ORLUNA®

Project Reference: \_\_\_\_\_

Product Reference: \_\_\_\_\_

### Luminaire Details

Fitting Type	Fixed Downlight
IP Rating	IP44 / IP65
Warranty	5 Years
Class	III
IP Zone	Zone 1
Standards	CE, BS EN 60598
Material	Aluminium ADC12
Cable type	2 Core 0.75mm <sup>2</sup>
Cable Length	300mm
Bezel Temp	F Rated

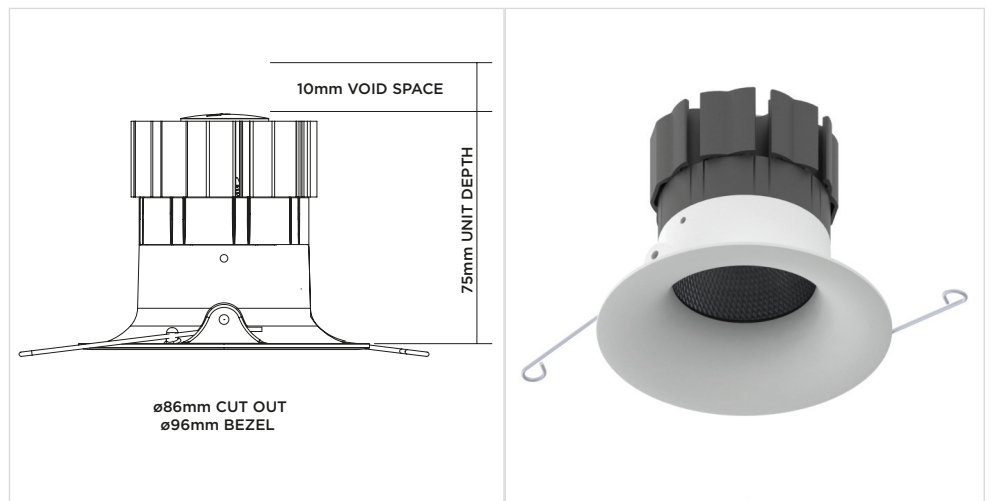

### Features & Benefits

- 98CRI R9 99
- TRUE BEAM
- Full beam options
- High LOR

<b>2700K</b>	<b>3000K</b>
<b>ORIGIN 98CRI</b>	<b>ORIGIN 98CRI</b>

LIGHT VALUES	SPOT	MEDIUM	WIDE	FLOOD	SPOT	MEDIUM	WIDE	FLOOD
<b>Beam Width FWHM</b>	<b>10°</b>	<b>29°</b>	<b>47°</b>	<b>51°</b>	<b>10°</b>	<b>29°</b>	<b>47°</b>	<b>51°</b>
Initial Lumens*	624	1077	1077	1077	661	1156	1156	1156
Engine Lumens*	437	931	931	924	455	954	984	978
*(Tc 85°C, +/-7%)								
Engine Lm/W	41	80	80	80	43	82	85	84
Luminaire Cd	4843	1753	1022	950	5044	1832	1051	957
Binning SDCM (Hot)	2				2			
DUV	0.001				0.001			
CRI (typ)(R9)	<b>98 (98)</b>				<b>98 (99)</b>			
TM30 Rf Rg	Rf 94 Rg 100				Rf 94 Rg 101			
Lifetime (ambient)	L90 B5 50,000hrs				L90 B5 50,000hrs			

For full test data, see Luminaire Photometric Reports at [orluna.com/downloads](http://orluna.com/downloads)

### LUMINAIRE POWER

Voltage	16.8v	34v	16.8v	34v
Drive Current	500mA	300mA	500mA	300mA
Circuit Power (typ)	10.6W	11.6W	10.6W	11.6W

### DRIVER

Protocols	Mains Dim / DALI / 0-10V / Non-dim
Dim to Dark	0.1% Lux
Distance from product	20m (series wiring)
Emergency	Emergency packs available

### Specification Code

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	IP Rating
<b>OR</b>	<b>- C V F -</b>	<b>27</b>	<b>M</b>	<b>S</b>	<b>- W -</b>	<b>F 44 E</b>
		27 / 2700K 30 / 3000K 40 / 4000K	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	S / Spot M / Medium W / Wide F / Flood	W / White RAL 9010 D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 C / Other RAL	F / Fire Rated 44 / IP44 65 / IP65 P / Sea & Spa J / Jigsaw E / 3hr Emergency Z / LSZH Cable