

DINO WARM DIM

Tilt & Rotate

ORLUNA®

Project Reference: _____


Product Reference: _____

Luminaire Details

Fitting Type	Adjustable Downlight
IP Rating	IP54
Warranty	5 Years
Class	III
IP Zone	Zone 1
Standards	CE, BS EN 60598
Material	Aluminium ADC12
Cable type	2 Core 0.75mm ²
Cable Length	300mm
Bezel Temp	F Rated

Features & Benefits

- Halogen-style Warm Dimming
- TRUE BEAM
- Low glare
- Double black baffle to the front
- Change accessories from the front

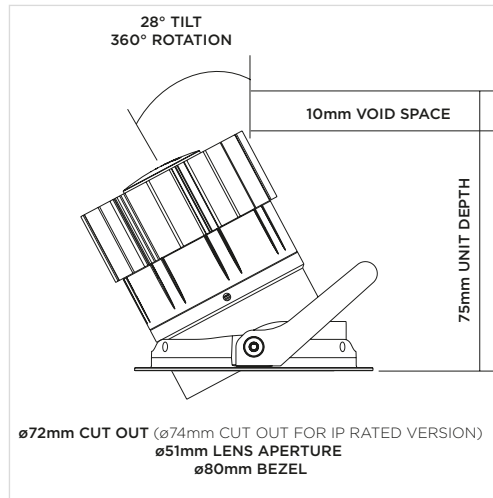

1800K - 2650K WARM DIM

LIGHT VALUES	MEDIUM	WIDE	FLOOD
Beam Width FWHM	27°	39°	45°
Initial Lumens*	901	901	901
Engine Lumens*	770	748	734
Luminaire Lumens*	510	479	489
*(Tc 85°C, +/-7%)			
LOR	66%	64%	67%
Lamp Lm/W	83	83	83
Luminaire Lm/cW	42	39	40
Luminaire Cd	1528	915	783
Binning SDCM (Hot)	3		
DUV	0.001		
CRI (typ)(R9)	94 (73)		
TM30 Rf Rg	Rf 92 Rg 101		
Lifetime (ambient)	L70 B5 50,000hrs		
LUMINAIRE POWER			
Voltage	36v		
Drive Current	300mA		
Circuit Power (typ)	12.2W		
DRIVER			
Protocols	Mains Dim / DALI / 0-10V		
Dim to Dark	0.1% Lux		
Distance from product	20m (series wiring)		
Emergency	Emergency packs available		

Specification Code

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
WD	DIR	WD	M	M	W	BB	F 54 E
			M / Mains Dim D / DALI O / 0-10v X / No Driver	M / Medium W / Wide F / Flood	W / White RAL 9010 D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 F / Antique Brass G / Polished Brass J / Antique Bronze K / Brushed Chrome L / Polished Chrome H / Antique Copper I / Polished Copper C / Other RAL	BB / Black WB / White RAL 9010 GB / Gold CB / Other RAL	F / Fire Rated 54 / IP54 65 / IP65 (Gaiter) C / Constant Torsion T / Lockable Tilt & Rotate E / 3hr Emergency H / Honeycomb S / Spreader Lens N / Frosted Lens

ORLUNA LED Technologies
Unit C, Holly Industrial Park,
Ryan Way, Watford
Herts WD24 4YP

info@orluna.com

+44 (0) 1923 889 712

07/10/17