

FINA WARM DIM

Fixed


ORLUNA®

Project Reference: _____

Product Reference: _____

Luminaire Details

Fitting Type	Fixed Downlight
IP Rating	IP54 / IP65
Warranty	5 Years
Class	III
IP Zone	Zone 1
Standards	CE, BS EN 60598
Material	Aluminium ADC12
Cable type	2 Core 0.75mm ²
Cable Length	300mm
Bezel Temp	F Rated

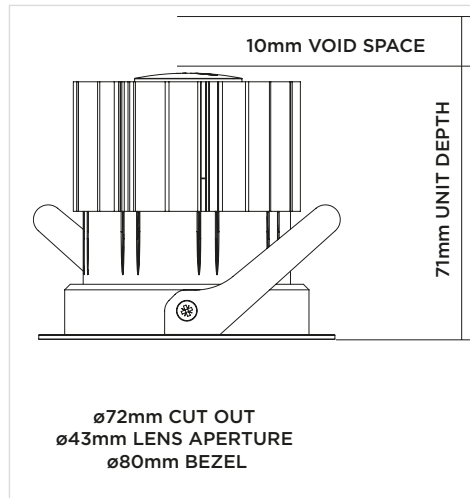

Features & Benefits

- Halogen-style Warm Dimming
- TRUE BEAM
- Shortened black baffle
- High LOR

1800K - 2650K WARM DIM

LIGHT VALUES	MEDIUM	FLOOD
Beam Width FWHM	37°	50°
Initial Lumens*	901	901
Engine Lumens*	770	734
<small>*(Tc 85°C, +/-7%)</small>		
Engine Lm/W	63	60
Luminaire Cd	1083	765
Binning SDCM (Hot)	3	
DUV	0.001	
CRI (typ)(R9)	94 (73)	
TM30 Rf Rg	Rf 92 Rg 101	
Lifetime (ambient)	L70 B5 50,000hrs	

For full test data, see Luminaire Photometric Reports at orluna.com/downloads

LUMINAIRE POWER

Voltage	36v
Drive Current	300mA
Circuit Power (typ)	12.2W

DRIVER

Protocols	Mains Dim / DALI / 0-10V
Dim to Dark	0.1% Lux
Distance from product	20m (series wiring)
Emergency	Emergency packs available

Specification Code

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
WD	FI	WD	M	M	W	BB	F 54 E
			M / Mains Dim D / DALI O / 0-10v X / No Driver	M / Medium F / Flood	W / White RAL 9010 D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 F / Antique Brass G / Polished Brass J / Antique Bronze K / Brushed Chrome L / Polished Chrome H / Antique Copper I / Polished Copper C / Other RAL	BB / Black WB / White RAL 9010 GB / Gold CB / Other RAL	F / Fire Rated 54 / IP54 65 / IP65 P / Sea & Spa C / Constant Torsion E / 3hr Emergency H / Honeycomb S / Spreader Lens N / Frosted Lens Z / LSZH Cable

ORLUNA LED Technologies
Unit C, Holly Industrial Park,
Ryan Way, Watford
Herts WD24 4YP

info@orluna.com

+44 (0) 1923 889 712

09/14/17