

# MURO ORIGIN

## Wallwasher


# ORLUNA®

Project Reference: \_\_\_\_\_

Product Reference: \_\_\_\_\_

### Luminaire Details

Fitting Type	Wallwasher
IP Rating	IP54 / IP65
Warranty	5 Years
Class	III
IP Zone	Zone 1
Standards	CE, BS EN 60598
Material	Aluminium ADC12
Cable type	2 Core 0.75mm <sup>2</sup>
Cable Length	300mm
Bezel Temp	F Rated

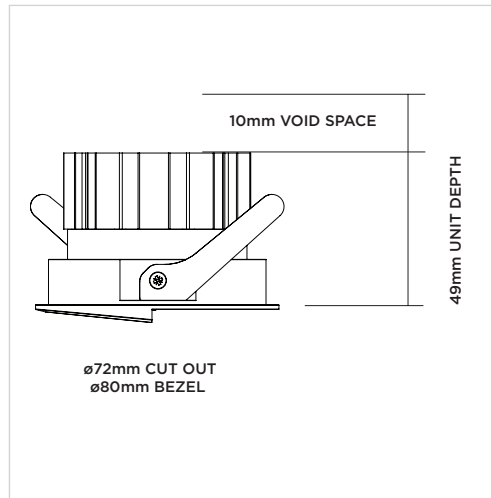

### Features & Benefits

- 98CRI R9 99
- Uniform beam

### 2700K ORIGIN 98CRI

### 3000K ORIGIN 98CRI

LIGHT VALUES	SPOT	SPOT
Beam Width FWHM	WALLWASH	WALLWASH
Initial Lumens*	1077	1156
Engine Lumens*	931	956
<small>*(Tc 85°C, +/-7%)</small>		
Engine Lm/W	80	82
Binning SDCM (Hot)	2	2
DUV	0.001	0.001
CRI (typ)(R9)	<b>98 (98)</b>	<b>98 (99)</b>
TM30 Rf Rg	Rf 94 Rg 100	Rf 94 Rg 101
Lifetime (ambient)	L90 B5 50,000hrs	L90 B5 50,000hrs

For full test data, see Luminaire Photometric Reports at [orluna.com/downloads](http://orluna.com/downloads)

### LUMINAIRE POWER

Voltage	34v	34v
Drive Current	300mA	300mA
Circuit Power (typ)	11.6W	11.6W

### DRIVER

Protocols	Mains Dim / DALI / 0-10V / Non-dim
Dim to Dark	0.1% Lux
Distance from product	20m (series wiring)
Emergency	Emergency packs available

### Specification Code

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Options
<b>OR</b>	<b>MU</b>	<b>27</b>	<b>M</b>	<b>A</b>	<b>W</b>	<b>F 54 E</b>
		27 / 2700K 30 / 3000K 40 / 4000K	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	A / Asymmetrical	W / White RAL 9010 D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 C / Other RAL	F / Fire Rated* 54 / IP54 65 / IP65 P / Sea & Spa C / Constant Torsion T / Lockable Tilt & Rotate E / 3hr Emergency Z / LSZH Cable

ORLUNA LED Technologies  
Unit C, Holly Industrial Park,  
Ryan Way, Watford  
Herts WD24 4YP

info@orluna.com

+44 (0) 1923 889 712

\*NOTE: Fire Hood if used with constant torsion springs

04/05/19

# MURO ORIGIN

Wallwasher

# ORLUNA®

Project Reference: \_\_\_\_\_

Product Reference: \_\_\_\_\_

