

300mA 0-10V ELDOLED

Code: DRIVER-0-300-1

ORLUNA®

Driver Details


Input Voltage	220 - 240V AC
Control Type	0-10V
Output current	300mA
Output Voltage	10 - 40V DC
Output Power	1 - 20W
Maximum Power	20W
Typical Efficiency	80%
Power Factor	>0.95
Inrush Current	1Ip/A

Environment

Ambient Temperature	-20°C to +55°C
Lifetime	50,000hrs
IP Zone	IP20

Wiring

- Wire + (LED output) to red luminaire cable
- Wire - (LED output) to black luminaire cable
- Wire + (0-10V) to positive 0-10V output cable (not supplied)
- Wire - (0-10V) to negative 0-10V output cable (not supplied)
- Wire -- (220-240VAC) to mains live and neutral cable
- Maximum 20m from driver to luminaire

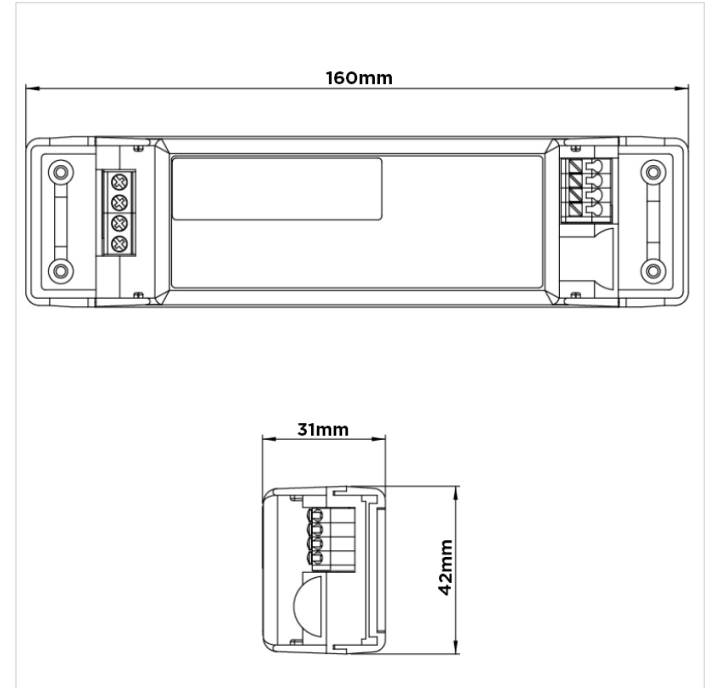

06/11/17