

AIR BUTTERFLY ORIGIN HIGH OUTPUT

Adjustable

ORLUNA®


Luminaire Details

Cut-out	Ø65mm
Recess Depth	45mm
Clearance	Ø250mm
Fixing Method	Retention Springs
Min Ceiling Thickness	5mm
Max Ceiling Thickness	28mm
Max Driver Distance	20m
Class	III
IP Rating	IP54
IP Zone	Zone 1
Material	Aluminium ADC12
Cable type	2 Core 0.75mm ²
Cable Length	300mm
Bezel Temp	F Rated



How to Install

- Cut hole in ceiling as per above cut-out;
- Wire luminaire cable to OrLuna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
- With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
- Holding butterfly springs vertically, feed the springs through the cut-out, then release them slowly to allow the base plate to meet with the ceiling.

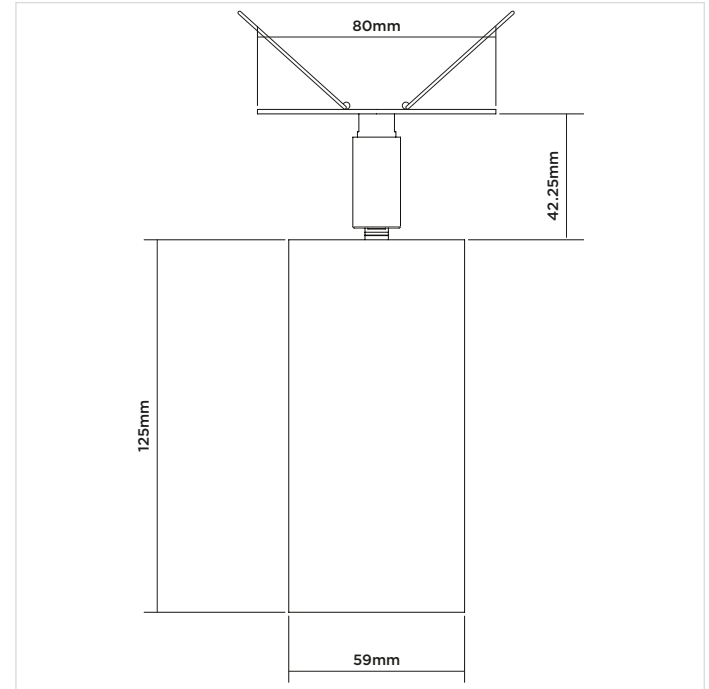

ORLUNA[®]

Installation Instructions