

MK GridPlus

Control system compatibilty

ORLUNA®

Project Reference: _____

Product Reference: _____

Control System Details


Manufacturer MK
 Model GridPlus K4501WHILV
 Load Range 0 - 200W
 Control Type Leading Edge

Luminaire Details

Engine Origin
 Driver Osram OTe11
 Wattage 13.3W

Summary

Dims to 3.63%
 Minimum 1, maximum 10 lights
 Loud buzz

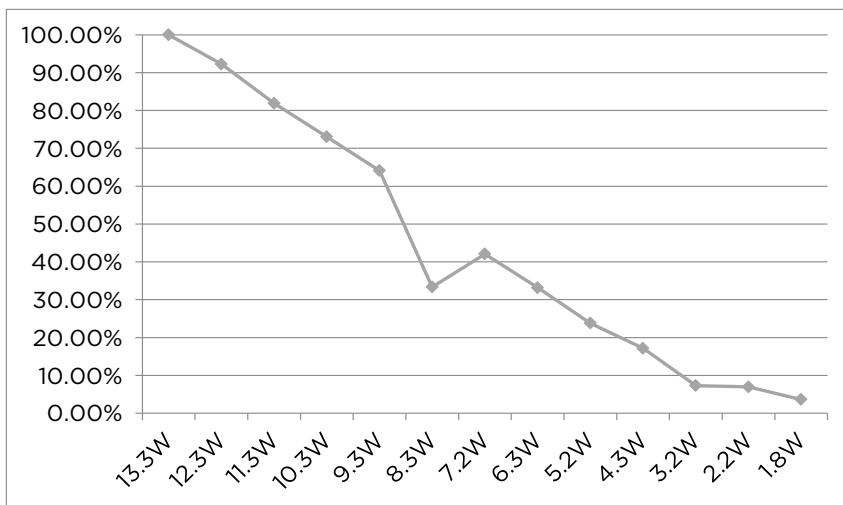

Power Setting	Dim %	Cd
(MAX) 13.3	100.00%	3550
12.3	92.25%	3275
11.3	81.89%	2907
10.3	73.07%	2594
9.3	64.11%	2276
8.3	33.35%	1184
7.2	42.08%	1494
6.3	33.15%	1177
5.2	23.80%	845
4.3	17.15%	609
3.2	7.30%	259
2.2	6.96%	247
(MIN) 1.8	3.63%	129

Min. Luminaires 1
Max. Tested Luminaires 10
Max. Extrapolated Luminaires 10
Waveform Smooth
Flicker None - step between 3W and 4W
Audible Noise 3dB above ambient 32dB
Instant Switch-on at Min % 3.63% or 1.8W
Notes Step up/down between 3W and 4W. Uneven dimming performance.

Minimum Level



Maximum Level

