

MK Rotary

Control system compatibilty

ORLUNA®

Project Reference: _____

Product Reference: _____

Control System Details


Manufacturer MK
 Model K14301WHI
 Load Range 0 - 150W
 Control Type Leading Edge

Luminaire Details

Engine Origin
 Driver Osram OTe11
 Wattage 13.5W

Summary


Dims to 3.42%
 Minimum 1, maximum 10 lights
 Loud buzz

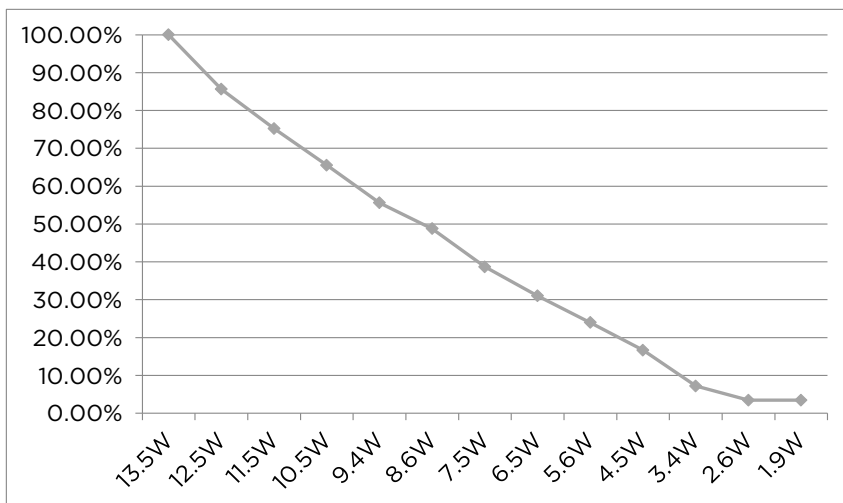

Power Setting	Dim %	Cd
(MAX) 13.5	100.00%	4381
12.5	85.60%	3750
11.5	75.21%	3295
10.5	65.53%	2871
9.4	55.60%	2436
8.6	48.78%	2137
7.5	38.67%	1694
6.5	31.00%	1358
5.6	23.97%	1050
4.5	16.66%	730
3.4	7.19%	315
2.6	3.42%	150
(MIN) 1.9	3.42%	150

Min. Luminaires	1
Max. Tested Luminaires	10
Max. Extrapolated Luminaires	10
Waveform	Smooth
Flicker	None
Audible Noise	7dB above ambient 32dB (LOUD)
Instant Switch-on at Min %	3.42% or 1.9W
Notes	Loud buzzing from both the driver and the switch.

Minimum Level

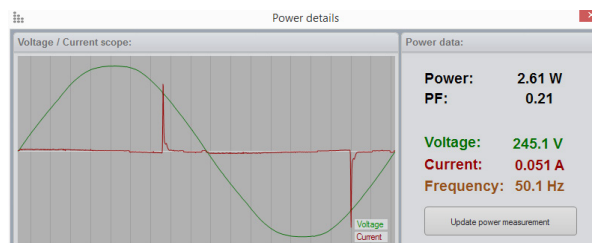

Maximum Level

