

# Mode Impulse

Control system compatibilty

**ORLUNA®**

Project Reference: \_\_\_\_\_

Product Reference: \_\_\_\_\_

### Control System Details

Manufacturer Mode  
 Model Impulse  
 Load Range 15-250W  
 Control Type Leading Edge

### Luminaire Details

Engine Origin  
 Driver Osram OTe11  
 Wattage 13W

### Summary

Dims to 10.73%  
 Minimum 1, maximum 13 lights  
 Hold-to-dim - can only measure max/min



**Power Setting**  
 (MAX) 13W  
 (MIN) 4.3W


**Dim %**  
 100.00%  
 10.73%

**Cd**  
 3990  
 428

**Min. Luminaires** 1  
**Max. Tested Luminaires** 10  
**Max. Extrapolated Luminaires** 13  
**Waveform** Smooth  
**Flicker** None  
**Audible Noise** 2dB above ambient 32dB  
**Instant Switch-on at Min %** 10.73% or 4.3W

**Notes** Hold-to-dim controls cannot be measured at interim dimming points, so the measurements only reflect the minimum and maximum. A curve cannot be generated from this.

### Minimum Level

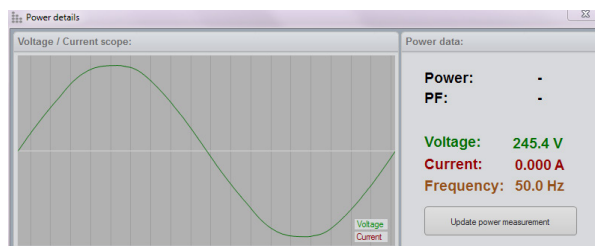

### Maximum Level

