

Zano ZGRIDLED

ORLUNA®

Control system compatibility

Project Reference: _____

Product Reference: _____

Control System Details


Manufacturer Zano
 Model ZGRIDLED
 Load Range 0-250W
 Control Type Trailing Edge

Luminaire Details

Engine Origin
 Driver Osram OTe11
 Wattage 10.4W

Summary

Dims to <0.1%
 Minimum 1, maximum 20 lights
 Silent
 Steps when dimmed
 Switches to max, not previous dim

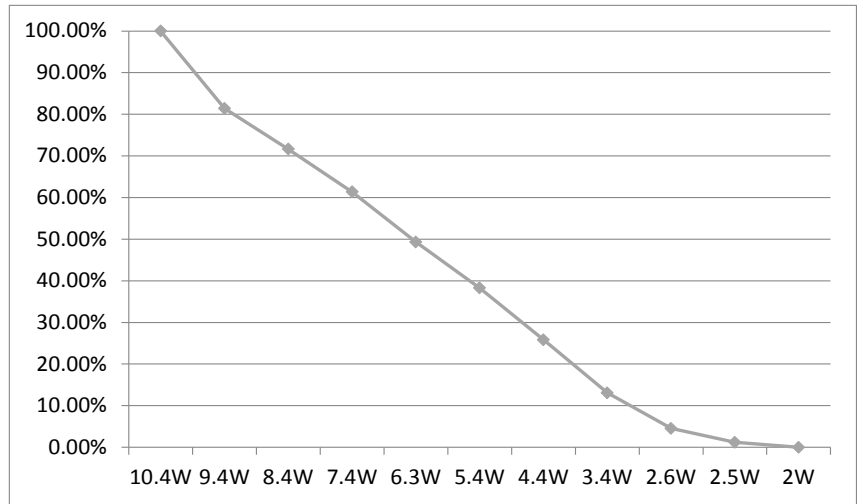

Power Setting	Dim %	Cd
(MAX) 10.4W	100.00%	3960
9.4W	81.39%	3223
8.4W	71.62%	2836
7.4W	61.36%	2430
6.3W	49.32%	1953
5.4W	38.26%	1515
4.4W	25.81%	1022
3.4W	13.08%	518
2.6W	4.55%	180
2.5W	1.20%	47.4
(MIN) 2.0W	0.00%	0.1

Min. Luminaires 1
Max. Tested Luminaires 10
Max. Extrapolated Luminaires 20
Waveform Smooth
Flicker None - Stepping when dimmed
Audible Noise None above ambient 32dB
Instant Switch-on at Min % 1.2% or 2.5W

Notes When starting, the dimmer switches to maximum and then dims to previous level. When dimming slowly, the dimmer steps.

Minimum Level



Maximum Level

