

Jigsaw, DMR and DMF



Installation Instructions

BEZEL	CUT OUT
DMF Detail Mini Fixed	Ø105mm
DMR Detail Mini Tilt & Rotate	Ø105mm

5 STEPS TO INSTALL

1. Cut a hole in your ceiling as per the “cut out” size above (also found on the label on the back of your luminaire - if unsure, please refer to our website or contact the Orluna team on our helpline below);
2. Place the jigsaw plate over the ceiling hole, and secure to the ceiling with appropriate corrosion-resistant screws;
3. Plaster the ceiling up to the lip of the Jigsaw plate;
4. Wire the luminaire cable into the Orluna certified driver, taking care to ensure polarity. Red should be connected to the positive terminal (+) and black to the negative terminal (-);
5. Connect the driver to the mains supply, paying close attention to our “hot wire” warning.

Note: For optimum performance, Ø250mm should be left free of insulation around the fitting.

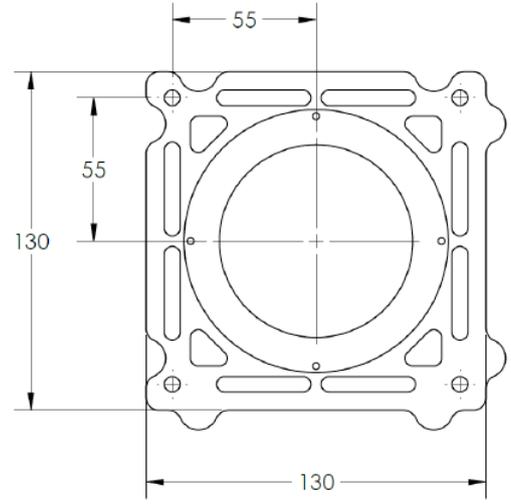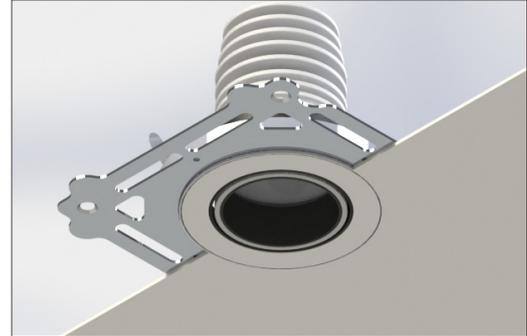

Jigsaw, DMR and DMF

Installation Instructions

Dear Contractor


Thank you for purchasing Orluna luminaires. We've engaged our expert focus to make this specification grade product fully contractor-friendly. On the reverse of this page, you'll find cutout sizes and installation instructions.

We also guarantee dimming compatibility on all major protocols and control systems. If you have any questions, please contact our team on +44(0)1923 889 712.

PRODUCT CODE

Using this, you can identify exactly which luminaire you are installing, including the engine, bezel, colour temperature, beam angle, driver, bezel colour, baffle colour, and any bespoke options, which include:

- Fire rating using an Orluna patented FirePlate
- IP rating (IP44 as standard, IP65 available)
- Low Profile (reduces void height requirement by 14mm*)

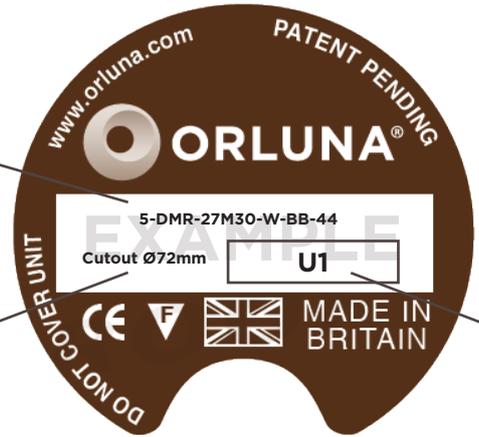

CEILING CUTOUT DIMENSION

LED REEL NUMBER (Batch Identification)

* Note that the void height requirement is for all non-dimmable and mains dimmable luminaires. DALI, 0-10V and emergency luminaires may require additional void height.