

Casambi TED

Control system compatibilty

Project Reference: _____

Product Reference: _____

Control System Details


Manufacturer Casambi
 Model TED
 Load Range 0 - 50W
 Control Type Trailing Edge

Luminaire Details

Engine Origin
 Driver Osram OTe11
 Wattage 11.8W

Summary

Dims to 0.01%
 Minimum 1, maximum 4 lights
 Dimmed using APP or switch

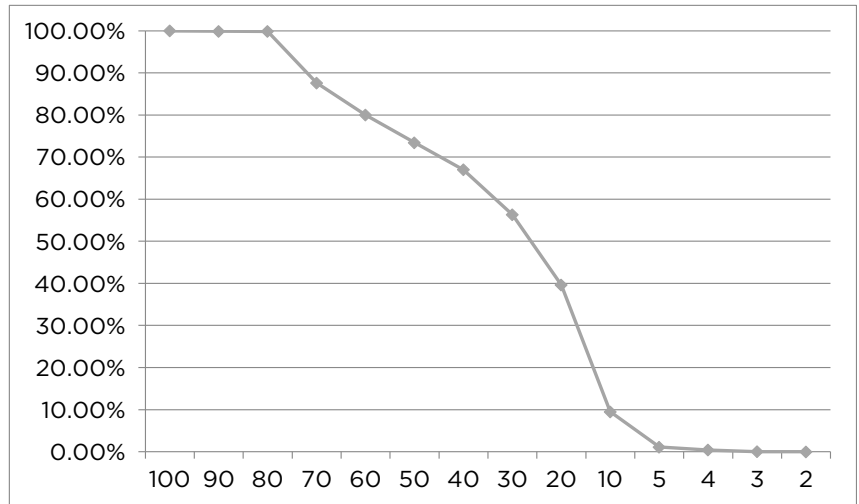

Power Setting	Dim %	Cd
(MAX) 100	100.00%	4971
90	99.88%	4965
80	99.86%	4964
70	87.61%	4355
60	80.00%	3977
50	73.43%	3650
40	67.01%	3331
30	56.31%	2799
20	39.63%	1970
10	9.50%	472
5	1.11%	55.1
4	0.41%	20.2
(MIN) 3	0.01%	0.4
2	0.00%	0

Min. Luminaires 1
Max. Tested Luminaires 4
Max. Extrapolated Luminaires 4
Waveform Smooth
Flicker None
Audible Noise None above ambient 32dB
Instant Switch-on at Min % 0.41% or app control 4%
Notes Dimmed using APP or switch

Minimum Level



Maximum Level

