

# Gira Touchdim

Control system compatibilty

**ORLUNA®**

Project Reference: \_\_\_\_\_

Product Reference: \_\_\_\_\_

**Control System Details**


Manufacturer Gira  
 Model Touchdim  
 Load Range 50 - 420W  
 Control Type Trailing Edge

**Luminaire Details**

Engine Origin  
 Driver Osram OTe11  
 Wattage 11.9W

**Summary**

Dims to 6.6%  
 Minimum 1, maximum 16 lights

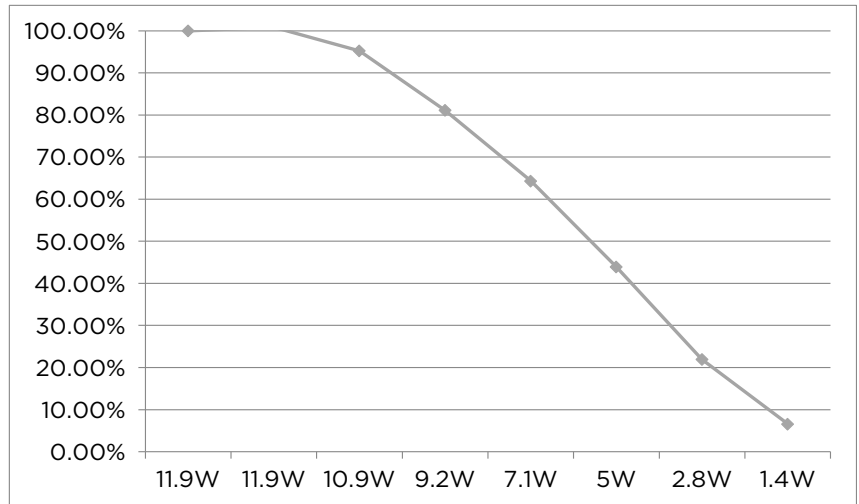

Power Setting	Dim %	Cd
<b>(MAX) 11.9</b>	100.00%	3907
11.9	100.84%	3940
10.9	95.24%	3721
9.2	81.14%	3170
7.1	64.32%	2513
5	43.92%	1716
2.8	21.93%	857
<b>(MIN) 1.4</b>	6.60%	258

<b>Min. Luminaires</b>	1
<b>Max. Tested Luminaires</b>	10
<b>Max. Extrapolated Luminaires</b>	16
<b>Waveform</b>	Smooth
<b>Flicker</b>	None
<b>Audible Noise</b>	None above ambient 32dB
<b>Instant Switch-on at Min %</b>	6.6% or 1.4W
<b>Notes</b>	None

**Minimum Level**



**Maximum Level**

