

# Knightsbridge

## Control system compatibility

ORLUNA®

Project Reference: \_\_\_\_\_

Product Reference: \_\_\_\_\_

### Control System Details


Manufacturer Knightsbridge  
 Model VFR400M  
 Load Range 0 - 100W  
 Control Type Leading Edge

### Luminaire Details

Engine Origin  
 Driver Osram OTe11  
 Wattage 12W

### Summary

Dims to 3.42%  
 Minimum 2, maximum 5 lights  
 Loud buzz

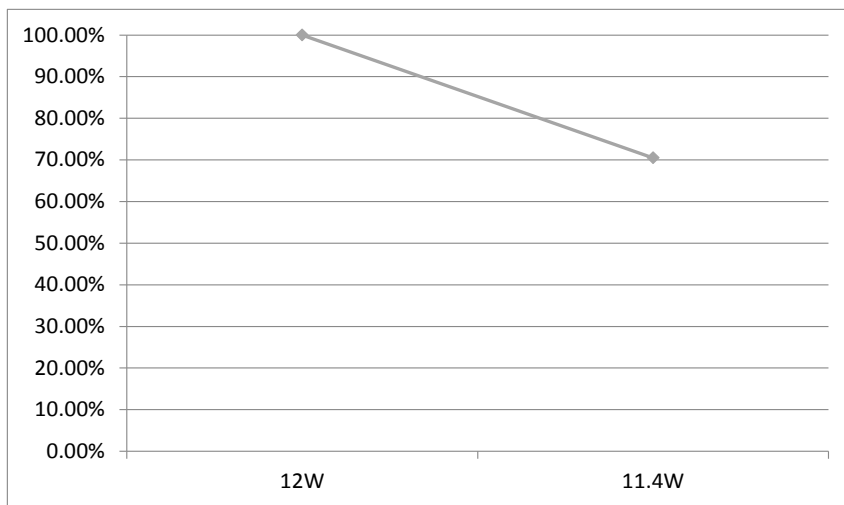

### Power Setting

(MAX) 12W  
 (MIN) 11.4

### Dim %

100.00%  
 70.48%

### Cd

2270  
 1600

### Min. Luminaires

2

### Max. Tested Luminaires

5

### Max. Extrapolated Luminaires

5

### Waveform

Smooth

### Flicker

None

### Audible Noise

7dB above ambient 32dB (LOUD)

### Instant Switch-on at Min %

70.48% or 11.4W

### Notes

Loud buzzing from both the driver and the switch. Very poor dimming, only capable of controlling luminaire by 0.6W

### Minimum Level

### Maximum Level

