

FADE LOPRO

Fixed


ORLUNA®

Project Reference: _____

Product Reference: _____

Luminaire Details

Fitting Type	Fixed
IP Rating	IP54 / IP65
Warranty	5 Years
Class	III
IP Zone	Zone 1
Standards	CE, BS EN 60598
Material	Aluminium ADC12
Cable type	2 Core 0.75mm ²
Cable Length	300mm
Bezel Temp	F Rated

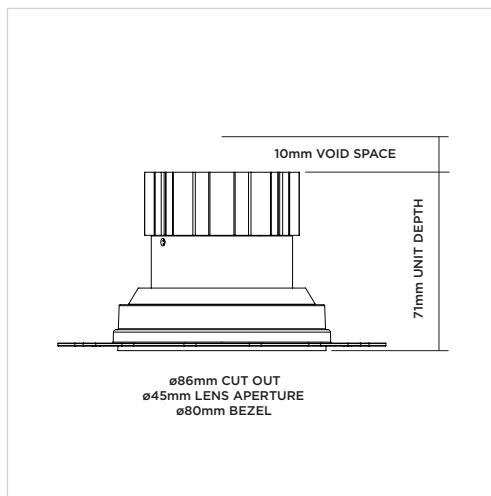

Features & Benefits

- 98CRI R9 99
- Ultra low profile
- Low glare
- Plaster-in
- Dedicated fixed

	2700K LOPRO 98CRI			3000K LOPRO 98CRI		
LIGHT VALUES	NARROW	MEDIUM	WIDE	NARROW	MEDIUM	WIDE
Beam Width FWHM	19°	21°	34°	18°	20°	35°
Initial Lumens*	1055	1055	1055	1057	1057	1057
Engine Lumens*	791	799	814	827	813	832
<small>*(Tc 85°C, +/-7%)</small>						
Engine Lm/W	68	69	70	71	70	72
Luminaire Cd	3819	3028	1138	3835	3027	1105
Binning SDCM (Hot)	2			2		
DUV	0.001			0.001		
CRI (typ)(R9)	98 (98)			98 (99)		
TM30 Rf Rg	Rf 94 Rg 100			Rf 94 Rg 101		
Lifetime (ambient)	L90 B5 50,000hrs			L90 B5 50,000hrs		

For full test data, see Luminaire Photometric Reports at orluna.com/downloads

LUMINAIRE POWER	2700K	3000K
Voltage	34v	34v
Drive Current	300mA	300mA
Circuit Power (typ)	11.6W	11.6W

DRIVER	Protocols	Mains Dim / DALI / 0-10V / Non-dim
Dim to Dark	0.1% Lux	
Distance from product	20m (series wiring)	
Emergency	Emergency packs available	

Specification Code

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
LO	- FDX -	27	M	N	- W	- BB	- F 54 E
		27 / 2700K 30 / 3000K 40 / 4000K	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	N / Narrow M / Medium W / Wide	W / White 9010 D / White 9003 E / White 9016 B / Black 9005 F / Antique Brass G / Polished Brass J / Antique Bronze K / Brushed Chrome L / Polished Chrome H / Antique Copper I / Polished Copper C / Other RAL	BB / Black 9005 WB / White 9010 DB / White 9003 EB / White 9016 FB / Antique Brass GB / Gold Anodised JB / Antique Bronze KB / Brushed Chrome LB / Polished Chrome HB / Antique Copper IB / Polished Copper MB / Polished Brass CB / Other RAL	F / Fire Rated 54 / IP54 65 / IP65 (Gaiter) P / Sea & Spa T / Lockable Tilt & Rotate E / 3hr Emergency H / Honeycomb S / Spreader Lens N / Frosted Lens Z / LSZH Cable

ORLUNA LED Technologies
Unit C, Holly Industrial Park,
Ryan Way, Watford
Herts WD24 4YP

info@orluna.com

+44 (0) 1923 889 712

03/13/19